



*"Simply Better"*

SKIRTEC GROUP PTY LTD  
ABN 77 074 107 805  
Head Office Contact:  
TEL 07 3375 6144  
FAX 07 3375 6033  
Email sales@skirtec.com.au

# C15050 SKIRTING DUCT

**FREECALL 1800 064 435**


3 Channel Aluminium Base and Cover 150mm X 50mm.

INTRODUCING

ANOTHER

*"Simply Better"*

ECONOMICAL  
SKIRTING DUCT  
PRODUCT

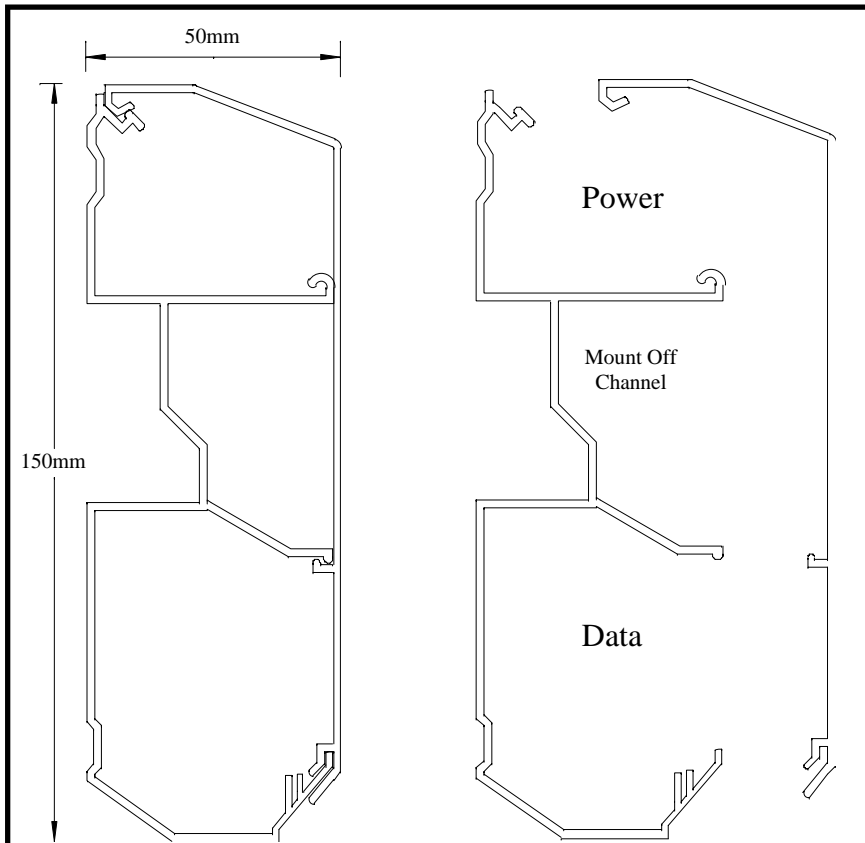

- \* CENTREMOUNT OUTLET KITS
- \* POWDERCOATED OR CLEAR ANODISED
- \* REFURBISH BY COVER CHANGE ONLY!

## DIMENSIONS

**Profile: 150mm X 50mm**

**Lengths: Base 3 metre**

**Cover 1.8 metre**

**Single outlet cover 160mm**

**Double outlet cover 295mm**

**Triple outlet cover 430mm**

Indicative cable capacity:

- up to 40 data/tele. & up to 10 power cables

\* Outlet kits to suit 84 mm mounting centres.

CAT No Description

C15050BC Skirting duct base & cover, per Metre

C15050IC Modular internal corner

C15050EC Modular external corner

C15050ES End Stop, left or right

C15050SO Single outlet kit\* - suit 1 grid plate (GPO/Data/Tele.)

C15050DO Double outlet kit\* - suit 2 grid plates (GPO/Data/Tele.)

C15050TO Triple outlet kit\* - suit 3 grid plates (GPO/Data/Tele.)

Std Colours Black & clear anodised, other colours available.

## SUGGESTED SPECIFICATIONS

The Contractor shall install a 3 Channel Skirting Duct System, SKIRTEC C15050, as indicated on the tender drawings.

Both power and communications outlets shall fit off in the centre channel, in line. Outlet kits shall provide for single, double and triple plates and suit all standard grid plates.

90 degree corners shall be factory made and modular.

The duct system shall be installed in accordance with the manufacturer's instructions and base sections shall be fixed to the walls at intervals no more than 900mm.

COLOURS AVAILABLE, FULL POWDER COAT RANGE AND ANODISED.